


Grape paper adhesive tape

## NO.744S

### Features

- Offers superior electronic component holding.
- Facilitates taping.
- Available in long lengths.

### Structure

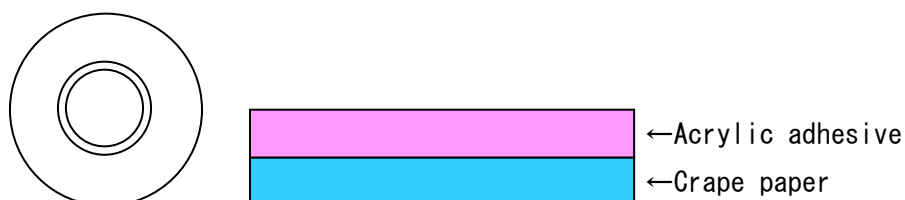

### Applications

- Radial taping of electronic components with lead pins.

### Properties

Table 1 General Properties

Item	Unit	NO. 744S
Thickness	mm	0.180
Color	—	Cream
Tensile Strength	N/15mm	80
Elongation	%	16
Pulling-out Force	N/15mm	130

Procedure of Pulling-out force test:

Taping Condition: 100°C X 1Mpa X 1sec

Lead Pin: Copper wire plated with Tin 0.6mm  $\phi$

Pulling-out Speed: 300mm/min

- For inquiries ---Technical Support Center, Electronics Device Materials Group T-COW  
E-mail : tcow@nitto.co.jp TEL : 81-532-41-7559 FAX : 81-532-41-8446

NO. 744S-e 1/1  
264-47264E-1309

**Notes:** This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.